


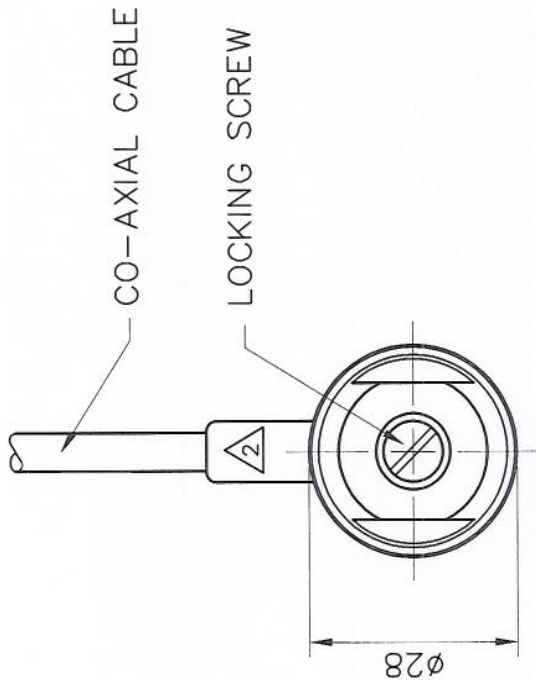

NOTES: -

1. MOUNTING HOLE $\phi 12.5$ (1/2") FOR MOUNTING FROM INSIDE VEHICLE.
MOUNTING HOLE $\phi 19.0$ (3/4") FOR MOUNTING FROM OUTSIDE VEHICLE.
2. CAP/NUT TO BE ASSEMBLED WITH A TORQUE OF 4Nm (3lb ft.)

ANTENNA MOUNT
NICKEL PLATED BRASS

2 CAP/NUT MOULDED
IN BLACK NYLON


2 RUBBER WASHER

2 CABLE ASSEMBLY MOULDED
IN BLACK NYLON

2 ST. STEEL
EARTHING
BRACKET

TNC PLUG
SUPPLIED FITTED

5m

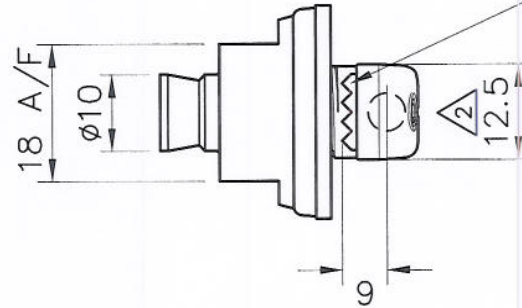

DRG. No.

M8-5T

TITLE

M8 BASE ASSEMBLY
5m COAX CABLE
TNC PLUG FITTED

MATERIAL

FINISH

DRAWN A.G. DO.CHECK K.D.

SCALE 1:1 DIMENSIONS IN mm

TOLERANCES UNLESS OTHERWISE STATED
0 DEC. PLACE ± 0.5 2 DEC. PLACES ± 0.1
1 DEC. PLACE ± 0.2 ANGULAR $\pm 1^\circ$

DO NOT SCALE

PROJECTION

APPROVAL

C/NOTE ISSUE DATE

01019 1 21.07.11 K.D.

01019 2 21.10.15

Δ - DENOTES LATEST
ISSUE CHANGES



PANORAMA
ANTENNAS

THIS DOCUMENT MUST NOT BE COPIED
OR DISCLOSED TO A THIRD PARTY
WITHOUT THE WRITTEN CONSENT OF
PANORAMA ANTENNAS LTD.

© 2011

A4