

OPERATING FREQUENCIES:



2400-2485 MHz

4900-6000 MHz

TOLERANCES UNLESS OTHERWISE STATED			
0 DEC. PLACE	±0.5	2 DEC. PLACES	±0.1
1 DEC. PLACE	±0.2	ANGULAR	±1°

NOTES:

1. SAMPLES MUST BE APPROVED BY PANORAMA ANTENNAS Q.C. BEFORE COMMENCING PRODUCTION.
2. ALL MATERIALS SUPPLIED MUST BE RoHS3 (DIRECTIVE (EU) 2015/863) COMPLIANT AND MUST NOT CONTAIN ANY SUBSTANCES OF VERY HIGH CONCERN (SVHCs) LISTED UNDER REACH OR POLY-AROMATIC HYDROCARBONS (PAHs), OR PERSISTENT ORGANIC POLLUTANTS (POPs) CONTROLLED BY THE STOCKHOLM CONVENTION.

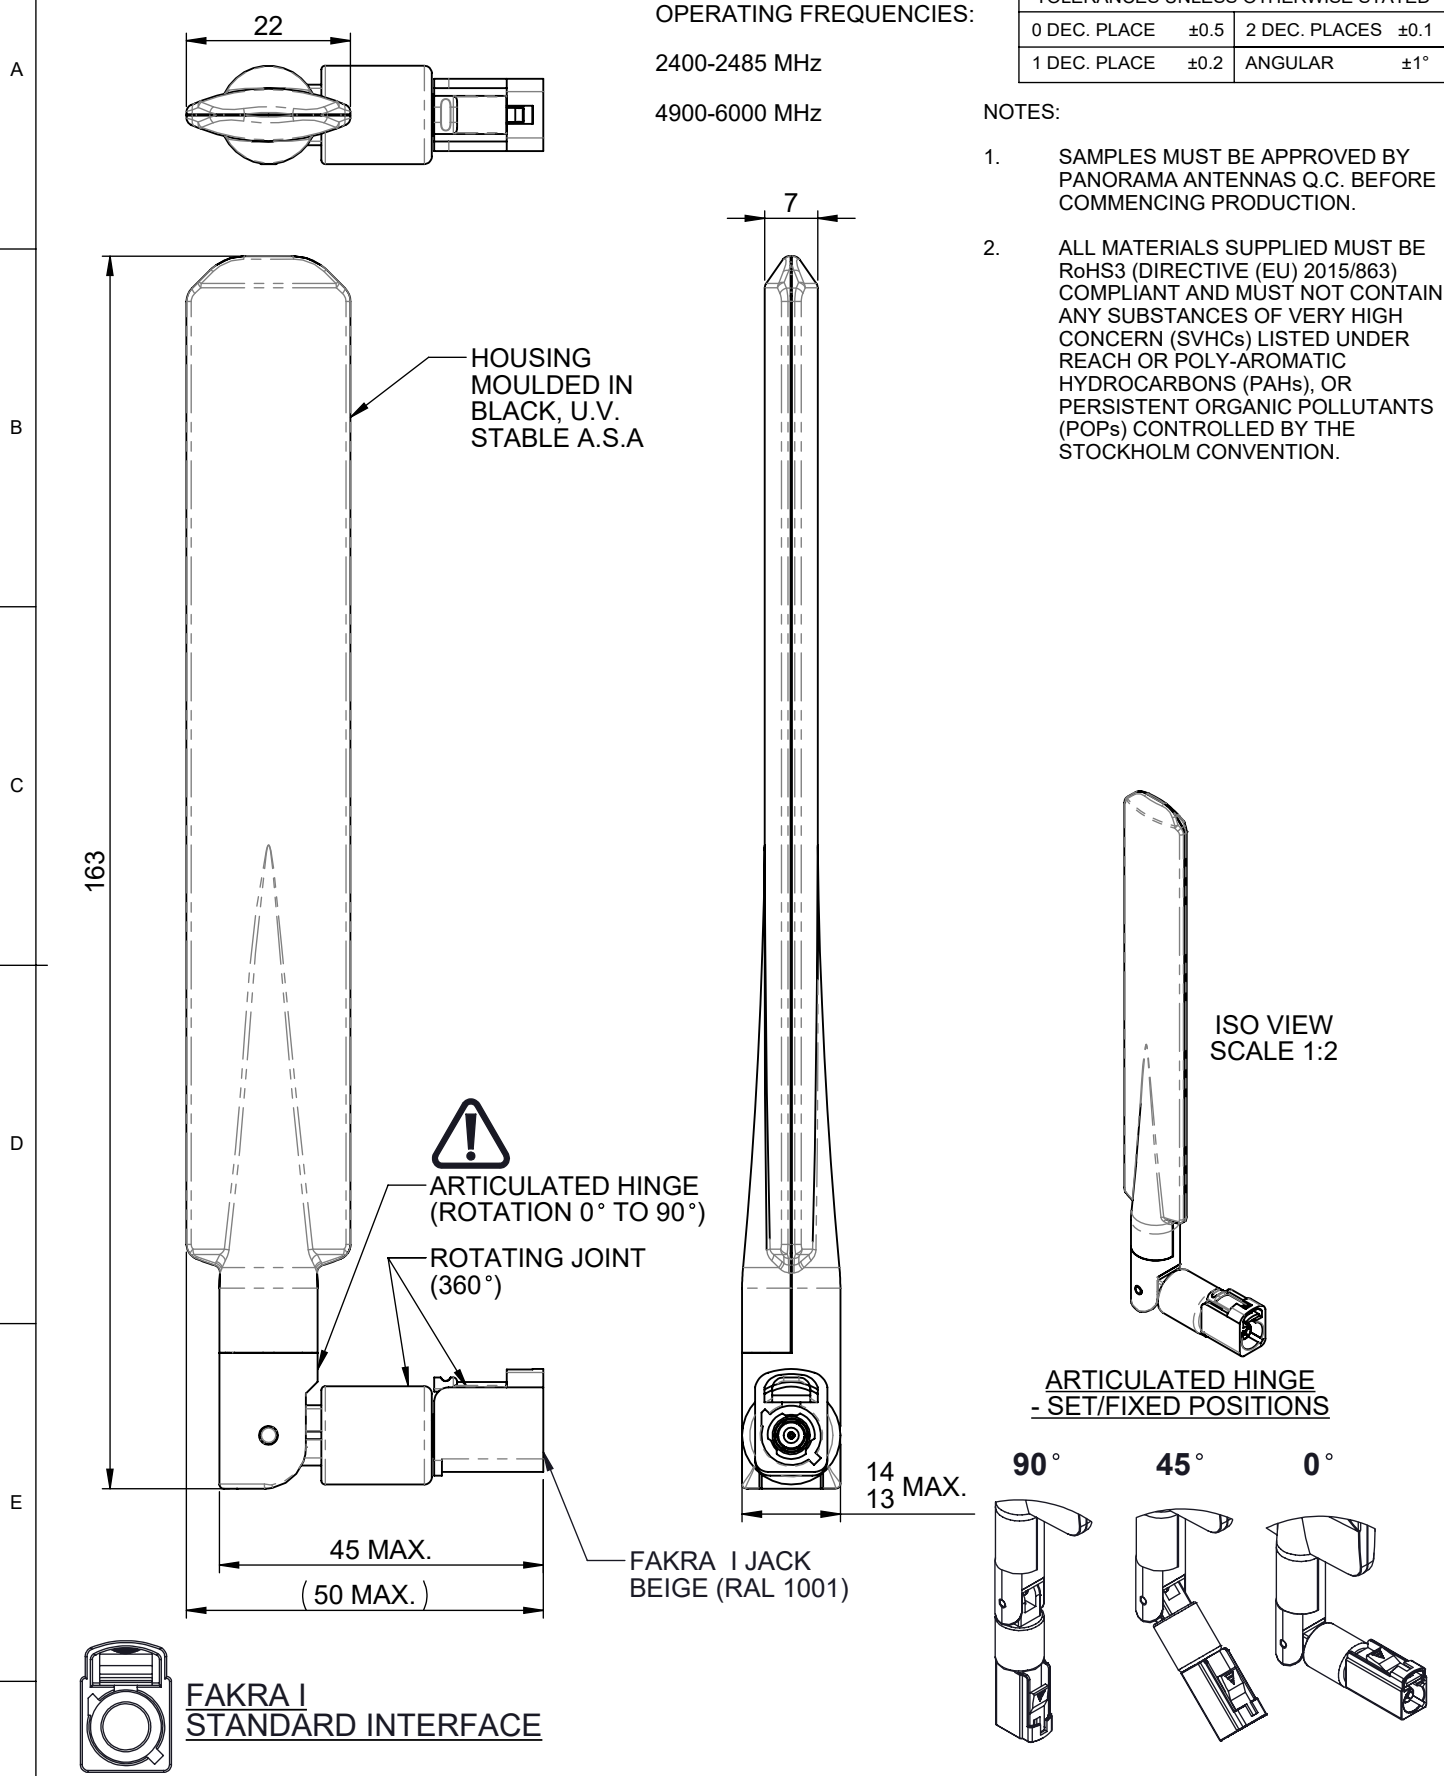

**FAKRA I
STANDARD INTERFACE**

F					PRODUCT/ASSEMBLY 1017 - TERMINAL ANTENNAS		DESCRIPTION 2.4/5.8GHz TERMINAL ANT RA FAKRA I JACK			
					MATERIAL N/A					
01019	A	INITIAL ISSUE	02/10/2020	PE	FINISH N/A	APPROVED KD	D.O.CHECK AR	SCALE 1:1	DIMENSIONS IN mm	
01019	1	PRODUCTION ISSUE	23/11/2020	PE	PANORAMA ANTENNAS					
PCN	REV.	DESCRIPTION	DATE	DRN						